

触摸按钮说明书

the manual of touch-mode button

简体中文



安装时请确认线路处于断电状态建议请专业电工安装

1 产品简介

本产品为电容式触摸感应门禁开关，具备环境温度及湿度的自动适应能力，不会受天气变化而影响灵敏度及稳定性。触摸时输出常开或常闭的开关信号，指示灯显示，待机时灯为绿色，触摸时灯为红色。


2 技术参数

特点	说明
工作电压	DC9-DC12V
工作电流	<600mA
环境温度	-30°C~60°C
环境湿度	20%-80%
外形尺寸	86*86*18mm
产品重量	82g


3 接线说明

线序	标识	颜色	功能描述
1	12V	红色	电源正极
2	GND	黑色	电源负极
3	NO	蓝色	继电器常开端
4	COM	紫色	继电器公共端
5	CN	橙色	继电器常闭端

4 门禁电源接线图

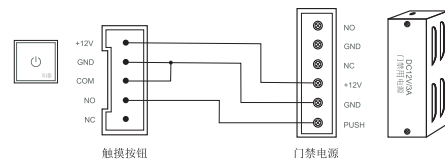

5 普通电源接线图

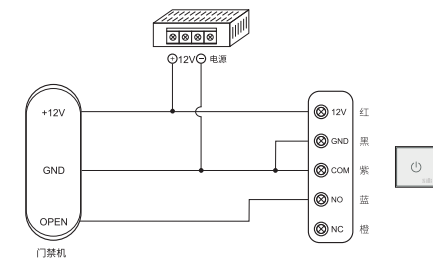

6 安装说明

- 在离地面约1.2米的墙面安装固定后盖；
- 把线焊接牢固并用绝缘胶布包好；
- 把面板扣到后盖上；
- 通电测试，安装完毕。

Touch Exit Button Manual

the manual of touch-mode button

English



Make sure the line is de-energized during installation

1 Product Feature

It's a sensitive touch exit button with adaptive capacity of temperature and humidity, meanwhile, it won't change sensitivity and stability as the weather changing. Output NO or NC signal and LED on upon touch it, Static LED is green, LED is red upon touch it.


2 Specification

Features	Description
Voltage	DC9-DC12V
Current	<600mA
Temperature	-30°C~60°C
Humidity	20%-80%
Dimension	86*86*18mm
Gross Weight	82g


3 Wiring

No.	Function	Color	Description
1	12V	Red	12V + DC Regulated Power Input
2	GND	Black	12V - DC Regulated Power Input
3	NO	Blue	Relay normally-on end(Connect positive electric lock "-")
4	COM	Purple	Relay Public end, connect GND
5	CN	Orange	Relay Closed end(connect negative electric lock "-")

4 Special power supply diagram

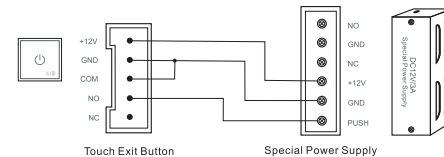

5 Common power supply diagram:

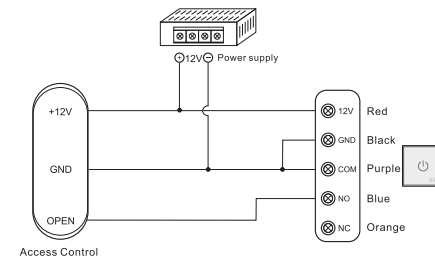

6 Installation

- Fix rear cover on about 1.2meters wall from the ground
- Solder wire and tie insulating tape up
- Fasten the front-panel to the rear cover
- Power on and test, installation finished